







15-Inch Monitor with LED Backlight and 5-Year Warranty

LED Backlight

With an energy-saving LED backlight, the FlexScan S1503-A uses only 5 watts during typical operation. The LED backlight does not contain any mercury for minimal environmental impact when the monitor is eventually disposed of.

Digital and Analog Inputs


With both DVI-D and D-Sub mini 15-pin inputs, you can use a computer that has either a digital or an analog graphics board (or



both if connected to two computers), and quickly switch between the inputs via a front panel button.

Optimized Brightness with Auto EcoView

The Auto EcoView function is a sensor on the front of the monitor that measures ambient light and optimizes the screen's brightness Since the screen is never too bright, eye strain is reduced while power consumption is cut by up to 50% EcoView compared to operating the monitor with Auto EcoView turned off and set to the default factory brightness of 100%.



Screen brightness dimmed in a dark environment

Preset Modes for Optimum Viewing

Choose from several preset modes for the various applications you work with.









Closely Simulates Documents and Books

With office and home spending increasing amounts of time viewing documents and books on their monitors rather than in printed form, Paper mode simulates the look of paper. Paper mode makes reading documents and



ebooks more comfortable and thereby reduces eyestrain.


Built-In Speakers

0.5-watt speakers are tucked away at the back of the monitor and out of view so you can enjoy sound while bezel size is kept to a minimum.

Built to Last Five Years

EIZO's five-year warranty is two years or 67% longer than the standard three-year warranty of most brands. Even if the initial purchase price of the FlexScan S1503-A is higher than another 15-inch monitor, the TCO (total cost of ownership) will likely be lower due to the significantly longer buying cycle and less need for repair.

5-Year vs. 3-Year Warranty

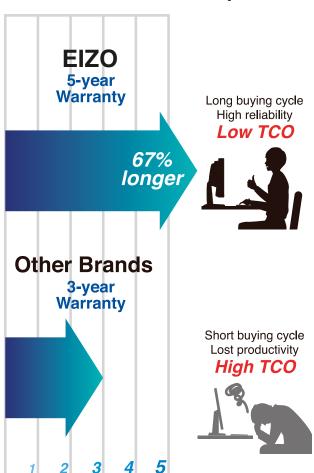

SPECIFICATIONS

Cabinet Colors	Gray, Black
Panel Type	TN
Backlight	LED
Size	15.0" / 38 cm (380 mm diagonal)
Native Resolution	1024 x 768 (4:3 aspect ratio)
Display Size (H x V)	304.1 x 228.1 mm
Pixel Pitch	0.297 x 0.297 mm
Display Colors	16.77 million from a palette of 1.06 billion
Viewing Angles (H / V, typical)	160°, 160°
Brightness (typical)	400 cd/m ²
Contrast Ratio (typical)	600:1
Response Time (typical)	8 ms (black-white-black)
Video Signals	D-Sub mini 15 pin x 1, DVI-D 24 pin x 1
Digital Scanning Frequency (H / V)	31 - 49 Hz, 59 - 61 Hz
Analog Scanning Frequency (H / V)	31- 49 kHz, 55 - 61 kHz
Sync Formats	Separate
Speakers	0.5 W + 0.5 W
Input Terminals	3.5 mm stereo jack
Sound Adjustment	Volume
Power Requirements	AC 100 - 240 V, 50 / 60 Hz
Maximum Power Consumption	16 W
Typical Power Consumption	5 W
Power Save Mode	0.5 W or less
Power Management	Power Save (DPM, DMPM)
Preset Modes	User1, User2, sRGB, Paper
Auto EcoView	Yes
OSD Languages	English, French, German, Italian, Japanese, Simplified and Traditional Chinese, Spanish, Swedish
Others	Screen Adjustment (Clock, Phase, Position, Range (Auto)), Smoothing (5 stages), Color Adjustment (Brightness, Contrast, Tempera- ture, Gain, Reset), Signal Switching, Power Indicator, Product Information (name, serial number, resolution, operating time, etc.), OSD Menu Position, Adjustment Lock, Reset, DDC/CI Lock
Dimensions (Landscape, W x H x D)	346 x 349 x 157 mm
Dimensions (Without Stand, W x H x D)	346 x 280 x 69 mm
Net Weight	4.7 kg
Net Weight (Without Stand)	3.4 kg
Tilt	30° Up, 0° Down
Hole Spacing (VESA Standard)	100 x 100 mm
Temperature	5 - 35 °C
Humidity (R.H., non condensing)	20 - 80 %
Certifications & Standards	TUV/Ergonomics, TUV/GS, RCM, CE, CB, cTUVus, FCC-B, CAN ICES-3 (B), TUV/S, VCCI-B, BSMI, RoHS, WEEE, China RoHS, CCC
Supplied Accessories	AC power cord, signal cables (DVI-D - DVI-D, D-Sub mini 15 pin - D-Sub mini 15 pin), setup guide
Warranty	Five Years