Setup Manual

DuraVision®
FDF2331W-IP

Color LCD Monitor

Software Version 7.3

Important

Carefully read this Setup Manual and User's Manual (downloaded from the website) before use to use the monitor correctly. Please retain this manual for future reference.

- You can check the latest product information, including the Setup Manual, from our web site.
  www.eizoglobal.com

This product has been adjusted specifically for use in the region to which it was originally shipped.
If operated outside this region, the product may not perform as stated in the specifications.

No part of this manual may be reproduced, stored in a retrieval system, or transmitted, in any form or by any means, electronic, mechanical, or otherwise, without the prior written permission of EIZO Corporation.
EIZO Corporation is under no obligation to hold any submitted material or information confidential unless prior arrangements are made pursuant to EIZO Corporation’s receipt of said information. Although every effort has been made to ensure that this manual provides up-to-date information, please note that EIZO product specifications are subject to change without notice.

About This Product

About the Usage of This Product

- This product is suitable for displaying surveillance camera images. If this product is to be used in applications that require an extremely high level of reliability and/or safety, such as the following, appropriate measures must be taken to ensure safety during use.
  - Transportation equipment (ships, aircraft, trains, and automobiles)
  - Remote control systems for industrial machinery such as construction machinery
  - Safety devices (Disaster prevention systems, security control systems, etc.)
  - Life-critical devices (medical devices, such as life-support devices and operating room devices)
  - Nuclear energy control devices (Nuclear energy control systems, security control systems of nuclear facilities, etc.)
  - Major system communication devices (operation control systems of transportation systems, air traffic control systems, etc.)
- This product has been adjusted specifically for use in the region to which it was originally shipped. If the product is used outside the region, it may not operate as specified in the specifications.
- This product may not be covered by warranty for uses other than those described in this manual.
- The specifications outlined in this document apply only when using the AC adapter and signal cables specified by EIZO.
- Only use optional products manufactured or specified by us with this product.

About the LCD Panel

- It takes about 30 minutes (under our measurement conditions) for the monitor display to stabilize. Please wait 30 minutes or more after the monitor power has been turned on, and then adjust the monitor.
- Monitors should be set to a lower brightness to prevent a loss in the screen quality caused by long-term use and to maintain stable use.
- If the screen image is changed after displaying the same image for an extended period of time, an afterimage may remain on the screen. Use the screensaver or sleep function to avoid displaying the same image for an extended period of time. An afterimage may appear even after a short time period has elapsed depending on the displayed image. In such cases, change the image or keep the power turned off for several hours.
- If the monitor displays continuously over a long period of time, smudges or burn-in may appear. To maximize the life of the monitor, we recommend the monitor be turned off periodically.
- The LCD panel is manufactured using high-precision technology. Although, missing pixels or lit pixels may appear on the LCD panel, this is not a malfunction. Percentage of effective dots: 99.9994 % or higher.
- The backlight of the LCD panel has a fixed lifetime. Depending on the usage pattern, such as usage for long continuous periods, the lifespan of the backlight may run out sooner, requiring replacement. When the screen becomes dark or begins to flicker, please contact your local EIZO representative.
- Do not press hard on the surface or outer frame of the LCD panel, as this may result in display malfunctions, such as interference patterns, etc. If pressure is continuously applied to the LCD panel surface, the liquid crystal may deteriorate or the LCD panel

may be damaged. (If the pressure marks remain on the LCD panel, leave the monitor with a black or white screen. The symptom may disappear.)

- Do not scratch or press on the LCD panel with any sharp objects, at this may result in damage to the LCD panel. Do not attempt to brush with tissues as this may scratch the panel.

About the Installation

- If you place this product on a lacquer-coated desk, the color may adhere to the bottom of the product due to the composition of the rubber. Please check before use.
- Dew condensation may form on the surface or interior of this product when it is brought into a cold room, when the temperature suddenly rises, or when it is moved from a cold room to a warm room. In that case, do not turn the product on. Instead wait until the dew condensation disappears, otherwise it may cause some damage to the product.

Cybersecurity Warnings and Responsibilities

- Please take the following measures to protect products and information assets from cyberattacks.
  - Prevent unauthorized physical access to the product by third parties.
  - Manage passwords so that they are not leaked.
  - Use this product on a secure network such as one that is isolated from the internet, a network within a firewall, or a VPN (Virtual Private Network).
- The latest software will be available on our website. Please review the update details and update the software as necessary, under your own responsibility.
- This product can be configured to log in automatically when the product starts without the need to enter a username and password. When setting up auto login, the administrator is responsible to take measures to prevent unauthorized access.
- This product encrypts and holds personal information, such as user names and passwords, and uses it for device authentication. In order to prevent information from being leaked, ensure proper disposal methods, such as erasing or destroying data when discarding the product.
- This product is equipped with various security features to prevent malicious access. To improve the security of the product, use these features properly.
  - USB lock function
  - Remote control lock function
  - HTTPS functionality
  - Web interface disable function
  - IP address filter function
  - IEEE 802.1X functionality
  - LDAP function
- For details on each function, refer to the User's Manual.

Cleaning

- Periodic cleaning is recommended to keep the product looking new and to prolong its operation lifetime.
- Gently wipe off any dirt on the product with a small amount of water or a soft cloth dampened with a mild detergent diluted in water.

Attention

- Never use a thinner, benzene, wax, or abrasive cleaner as they may damage the product.
- Use of alcohol or other chemicals for disinfection may lead to cracks, changes in gloss, discoloration, fading, or deterioration of display image quality. Be careful of the following points when using the product.
  - Do not let chemicals come into direct contact with the product.
  - Do not use wet wipers that have been impregnated with chemical solution, as they may contain a lot of liquid.
  - Do not allow chemicals to enter gaps or the interior of the product. Doing so may cause product malfunction.
- For more information on cleaning and disinfection, please refer to our web site.
  How to check: Access www.eizoglobal.com and type "disinfect" in the site search box to search.

Disclaimer

- EIZO shall not be held responsible for any direct or indirect damages (including, but not limited to, loss of anticipated profits) arising from the use or malfunction of this product, or any other related issues.
  - Misuse or negligence by the customer
  - Disassembly, repair, or modification by the customer
  - Inability to display images due to any reason or cause, including product malfunction or defects
  - Combination with third-party equipment or devices
  - Occurrence of privacy violations or other issues related to the customer's surveillance images due to any reason
  - Loss of registered or recorded information due to any reason
- This product can display images monitored by a camera, but this product alone does not prevent crime, etc.

CONTENTS

About This Product **3**
About the Usage of This Product 3
About the LCD Panel 3
About the Installation 4
Cybersecurity Warnings and Responsibilities 4
Cleaning 5
Disclaimer 5
1 Introduction **8**
1.1 Package Contents 8
1.2 Controls and Functions 9
1.3 System Configuration 11
2 Setup **14**
2.1 What to Prepare 14
2.2 Setting Cameras 14
2.3 Installation 16
2.4 Connecting Cables 16
2.5 Registering a User During Initial Startup 17
2.6 Displaying the Live Image Screen 22
2.7 Displaying the Setting Screen 23
2.8 Registering a Camera Using Auto Discovery 25
2.9 Preparing the Remote Control 26
3 Other Settings **27**
3.1 Updating Software 27
3.2 Registering a License 27
3.3 Save and Load Settings Data to Other Products 28
3.4 Registering a Camera Manually 29
3.5 Registering Still Images 36
4 Troubleshooting **37**
4.1 Power Problems 37
4.2 Camera Registration Problems 38
4.3 Video Problems 39
4.4 Other Problems 42
4.5 Checking a Camera Connection with Ping 43
4.6 Checking for Duplicate IP Addresses 43
4.7 Checking the IP Address of a Computer 43
Appendix **44**

Warning for Radio interference 44
For U.S.A, Canada Only 44
For Europe, Australia, New Zealand, etc Only..... 45
LIMITED WARRANTY 45

1 Introduction

This document explains the settings required to display camera (network camera) images on a monitor.

1.1 Package Contents

Check that all of the following items are included in the package. If any of these are missing or damaged, contact your dealer or local EIZO representative listed separately.

Note

- The User's Manual is not included with the product. Please download it from our web site using the steps below.
  1. Access www.eizoglobal.com.
  2. From the menu, select "Support" > "Manuals."
  3. In the "Enter model name" text box, enter "FDF2331W-IP," and then press the "Search" button.
  4. Click the icon for the User's Manual.
- It is recommended that the box and packing materials be stored so that they can be used to move or transport this product.


- Monitor
- Power cord



- Setup Manual (this document)
- PRECAUTIONS


1.2 Controls and Functions

1.2.1 Front

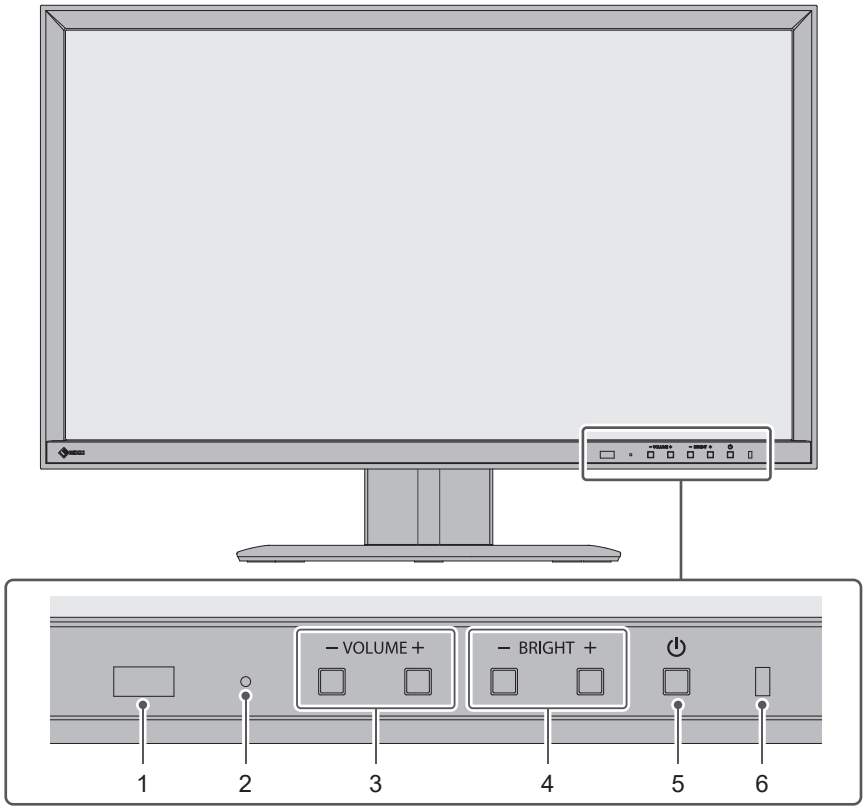

1. Remote control receiver	Receives signals from the remote control. For details on the receiver range, refer to the User's Manual.
2. Reset button	Press and hold for 10 seconds to reset all settings to their defaults, except for the system log, operation log, current time, time zone settings, license authentication information, and software version.
3. VOLUME- / VOLUME+ buttons	Adjusts the volume. Press and hold to make quick adjustments.
4. BRIGHT- / BRIGHT+ buttons	Adjusts the screen brightness. Press and hold to make quick adjustments.
5. ⏻ button	Turns the power on or off.
6. Power indicator	Indicates the operating status of the product. Blue: Normal operation mode Blinking blue: Starting up Red: Power is off Off: Main power is off

1.2.2 Back

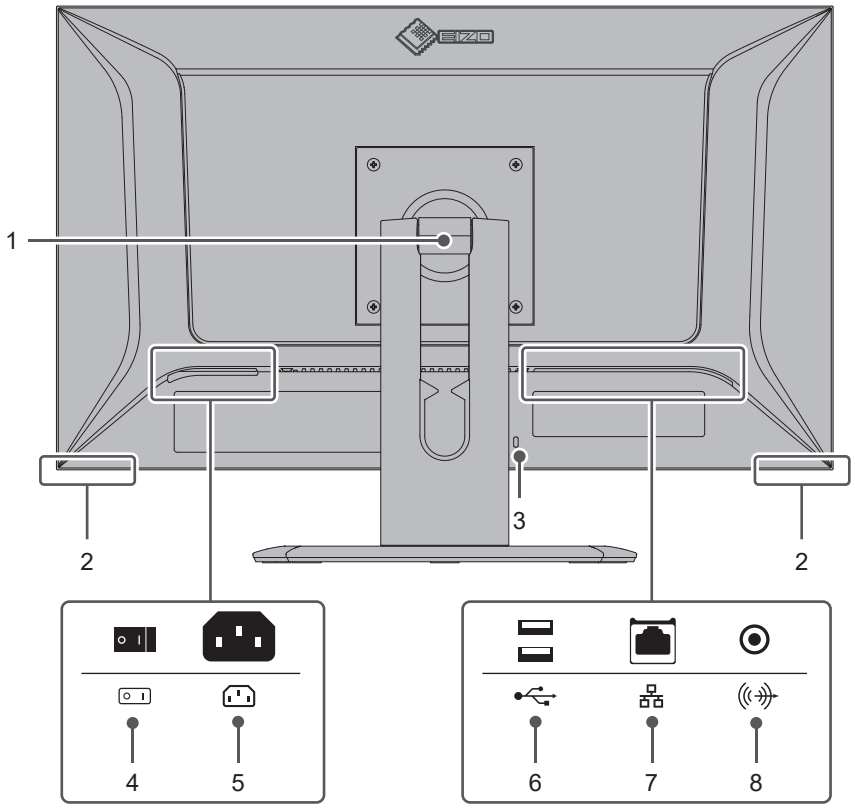


1. Stand[*1]	The angle (tilt) can be adjusted.		
2. Speakers	Outputs beep sounds from the device and audio from network cameras.		
3. Security lock slot	Complies with Kensington's MicroSaver security system.		
4. Main power switch	Turns the main power on or off. | : On, ◯: Off		
5. Power connector	Connects the power cord.		
6. USB downstream port	Connects a USB mouse, USB keyboard, or joystick.		
7. LAN port	Connects a network cable.		
		a) Active LED	Off: No data communication
			Blinking orange: Data communication in progress
		b) Link LED	Off: Network connection not established
			Green light: Network connection established
8. Stereo mini jack	This terminal outputs beep sounds from the device and audio from network cameras. Connects a commercially available stereo mini jack cable.		

[*1] A separate stand (or monitor arm) can be attached to this product by removing the stand.

1.3 System Configuration


This product is used by connecting to a network.

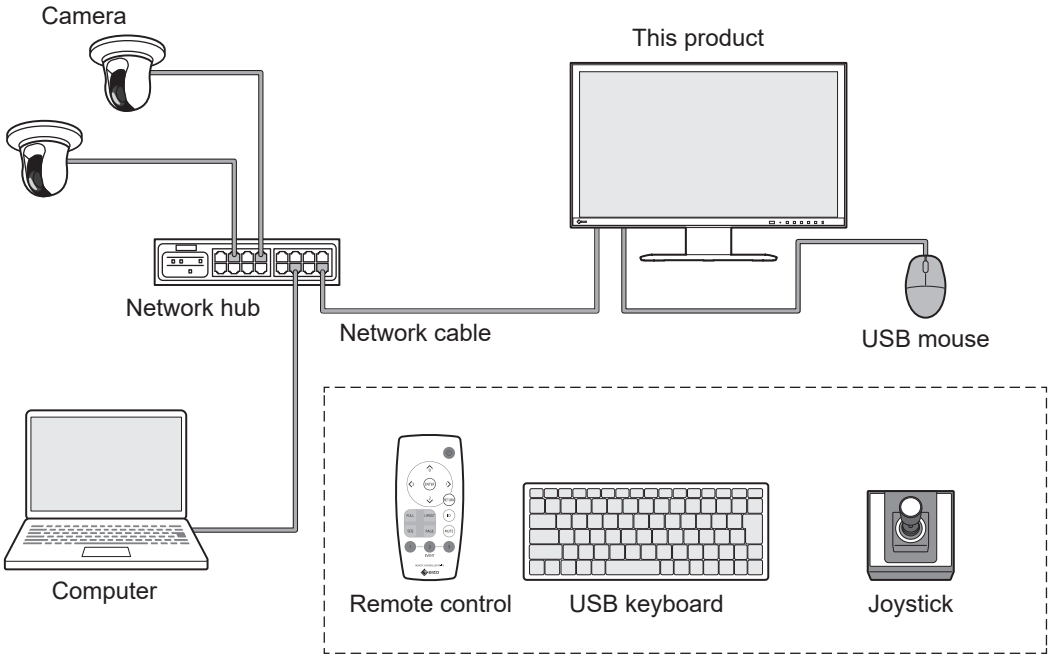

Note

IP Addresses

- Since an IP address is equivalent to an address on a network, you must set a unique IP address for each device (refer to "System Settings" - "Configure Network Settings" in the User's Manual). If an IP address that conflicts with another device is set, communication will not function properly.

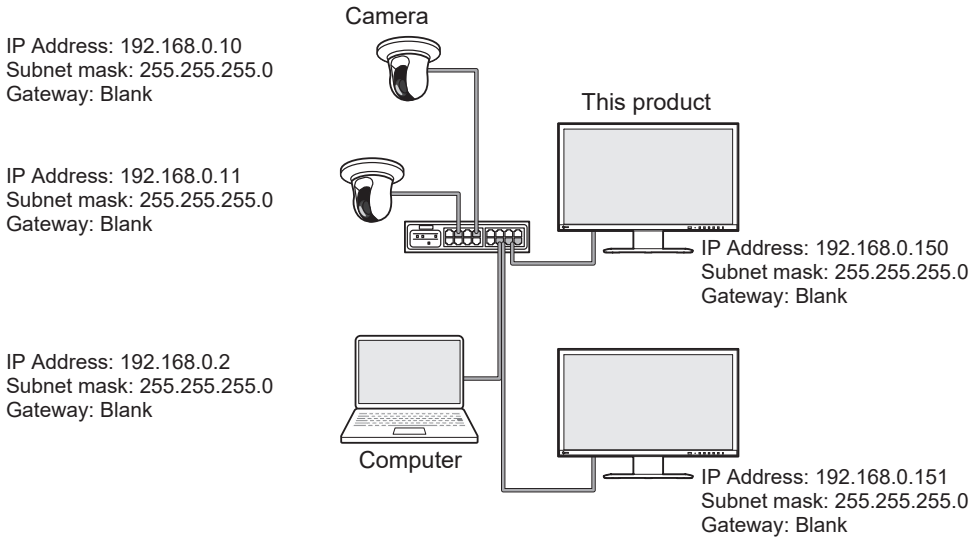

- If your environment does not have a gateway (default gateway), you do not need to set "Gateway."
- The default IP address for this product is "192.168.0.150." When installing multiple units, set unique IP addresses (refer to 4.6 Checking for Duplicate IP Addresses [▶ 43]).

1.3.1 Camera (Network camera)

Cameras compliant with ONVIF® Profile S, Axis cameras, or Panasonic/i-PRO cameras

Attention

Camera compatibility

- In addition to displaying video, this product supports PTZ control and setting changes of cameras. However, not all functions may be available due to reasons such as the required API not being provided. For functions that are not available from this product or do not work as expected, please operate them directly on the camera.
- If you need to control the PTZ settings of the camera from this product, please refer to the compatibility information of verified cameras.
  www.eizoglobal.com/support/db/products/model/FDF2331W-IP

ONVIF is a trademark of ONVIF Inc.

1.3.2 Network hub

A network hub that supports 1000BASE-T / 100BASE-TX

When supplying power to the camera using a network cable, use a PoE compatible network hub.

1.3.3 Network cable

Category 5e or higher straight cable

1.3.4 USB mouse

Used to control the live screen and setting screen.

Attention
• Only the live image screen can be controlled with the remote control.

1.3.5 Computer

Used to configure the product and cameras. After configuring, it can be removed from the network.

The following settings are available only if you are using a computer.

- Entering characters other than alphanumeric characters and symbols in the camera name
- Updating software
- Registering a license
- Saving/loading system information
- Saving logs
- Registering still images

If your computer does not have a LAN port, consider using a USB LAN adapter.

2 Setup

2.1 What to Prepare


Prepare a USB mouse and computer.

If you do not have an Internet connection at your work location, please have the following files on your computer in advance.

File	Where to get it
Set of user manuals • Setup Manual (this document) • User's Manual	Please download the necessary files from the EIZO web page. www.eizoglobal.com/support/db/products/model/FDF2331W-IP
Latest version of the system software	
License file	Additional features are available with the purchase of a license. For details on features, refer to the User's Manual. For details on purchasing a license, contact your dealer or local EIZO representative.

2.2 Setting Cameras

To use this product to display camera images, cameras must be set up in advance.

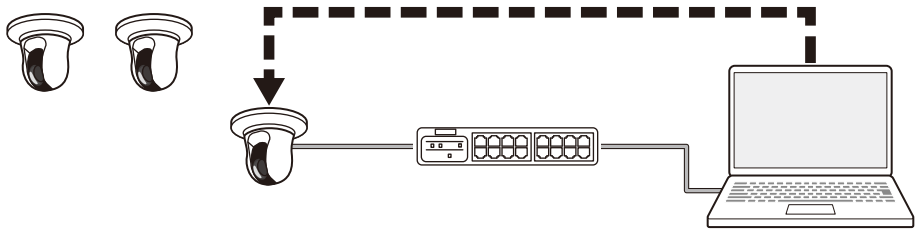

Refer to the User’s Manual of the camera and make the following settings.

2.2.1 Username and Password

Set a password of up to 32 characters using alphanumeric characters and symbols for a user with administrative privileges.

2.2.2 Date and Time

Select a time zone and set the correct date and time.

2.2.3 IP Address

Set an IP address that does not overlap with another device.

2.2.4 Stream


Set the stream to match the decoding performance of this product.

- Check if the stream is enabled.
- When using the "Panasonic/i-PRO" protocol, it connects to stream 2 by default.

Note

Camera streams

Generally, cameras support multiple streams and can simultaneously transmit images with different resolutions and frame rates.

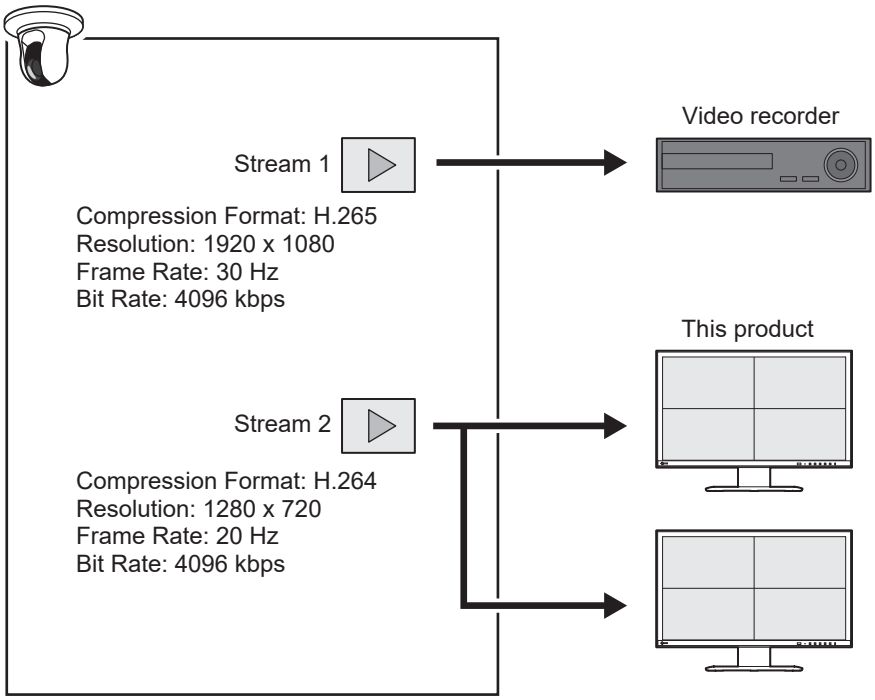

- By separating stream 1 for recording and stream 2 for live viewing, you can prevent changes to stream settings from affecting other devices.
- When registering a camera using the "Panasonic/i-PRO" protocol, it connects to stream 2 by default.
- The stream to be connected can be changed in manual registration (refer to 3.4 Registering a Camera Manually [▶ 29]).

Video compression format

Select the video compression format according to the "Protocol" used for camera registration.

- "ONVIF"
  H.264 or MJPEG (when "Media Type" is "Media1"), or H.265 or H.264 (when "Media Type" is "Media2"[*1]).
- "AXIS®"
  H.265 or H.264
- "Panasonic/i-PRO"
  H.265 or H.264

[*1] The camera must comply with both ONVIF Profile S and ONVIF Profile T.

Note
• For the latest operating status for H.265, refer to the camera compatibility information on the EIZO website.

Bit Rate

Set a value to 8192 kbps or less. (4096 kbps recommended)

Resolution / Frame Rate

Set the "Resolution" and "Frame Rate" according to the number of cameras to be simultaneously displayed on the live image screen.

H.265 / H.264 (when "Bit Rate" is set to "4096 kbps")

1 Screen Layout	3840 x 2160 / 30 fps, 1920 x 1080 / 60 fps
4 Screens Layout	3840 x 2160 / 15 fps, 1920 x 1080 / 60 fps
9 Screens Layout	1920 x 1080 / 20 fps
16 Screens Layout	1920 x 1080 / 15 fps

MJPEG

640 x 480 / 30 fps

Attention
• The values above are provided for reference purposes. • If the stream exceeds the display capabilities of this product, the frame rate of the camera footage will be forcibly reduced. Reduce the resolution and/or bit rate.


2.3 Installation

This product should be placed on a stable surface such as a desk, or installed using an arm after removing the stand section. To help prevent theft, we recommend using the security lock slot on the back of the product.


To protect the product and information assets from cyberattacks, it is the responsibility of the user to implement measures to prevent unauthorized physical access to the product by third parties.

2.4 Connecting Cables


1. Connect this product and camera to the network hub using network cables.

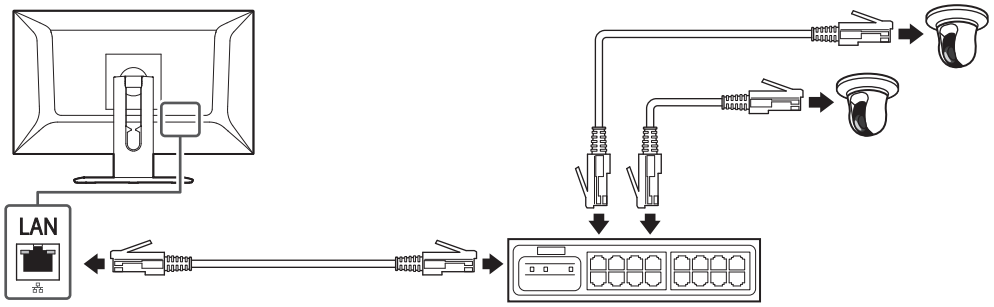

2. Plug the power cord into the power connector on the monitor and a power outlet.
   Make sure the power cord is fully inserted into the connector on the monitor.

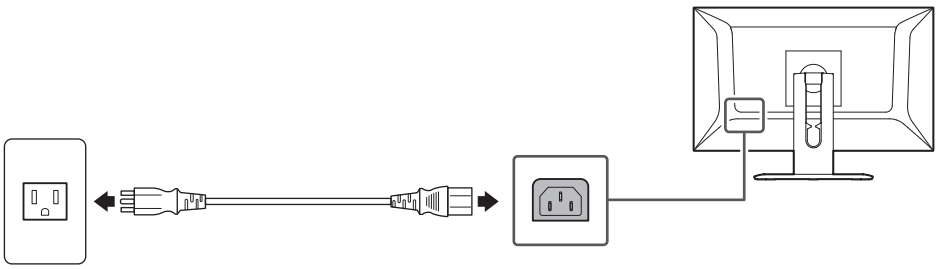

3. Connect a USB mouse to the USB downstream port.

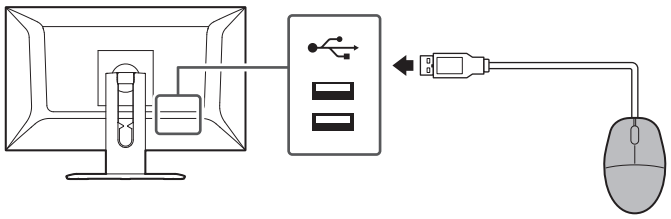

2.5 Registering a User During Initial Startup


When starting this product for the first time, the initial setup wizard appears. Follow the on-screen instructions to configure each item.

- Registering the Initial User on the Monitor Console [▶ 17]
- Registering the Initial User on the Web Console [▶ 20]


2.5.1 Registering the Initial User on the Monitor Console

Perform operations using a USB mouse. Operations cannot be performed using the remote control.

When clicking an item that requires text entry, a software keyboard appears.

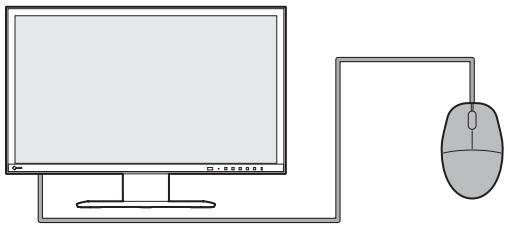

1. Check if the main power switch is on.

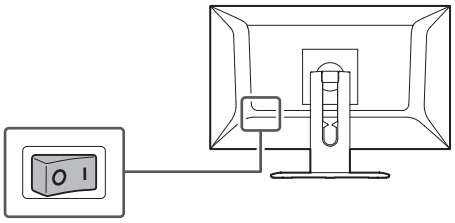

2. Press the power button (⏻) on the front of the product to turn on the power.
   The initial setup wizard appears.

3. Follow the on-screen instructions to configure each item.
   - "Language" (Language [▶ 18])
   - "Keyboard Layout" (Keyboard Layout [▶ 18])
   - "Time Zone" (Time Zone [▶ 18])
   - "Date Format" (Date Format [▶ 18])
   - "Time Format" (Time Format [▶ 18])
   - "Clock Mode [Only for the web console]" (Clock Mode [Only for the web console] [▶ 18])
   - "Date and Time" (Date and Time [▶ 18])
   - "User Level" (User Level [▶ 19])
   - "Username" (Username [▶ 19])
   - "Password" (Password [▶ 19])
   - "Confirm Password" (Confirm Password [▶ 19])
   - "IP Address" (IP Address [▶ 19])
   - "IP Address" (IP Address [▶ 19])
   - "Subnet Mask" (Subnet Mask [▶ 19])
   - "Gateway" (Gateway [▶ 20])
   - "Hostname" (Hostname [▶ 20])
   - "Protocol" (Protocol [▶ 20])
4. Click "Apply."
5. Click "OK" in the confirmation dialog box.

Language

Settings: "日本語" / "English" / "Deutsch"

Select the language.

Keyboard Layout

Settings: "Japanese" / "English(US)" / "English(UK)" / "German"

Select the keyboard layout.

Time Zone

Select the time zone.

Date Format

Settings: "yyyy/mm/dd" / "Mmm/dd/yyyy" / "dd/Mmm/yyyy" / "mm/dd/yyyy" / "dd/mm/yyyy" / "No Date Display"

Select the date display format.

Time Format

Settings: "24h" / "12h"

Select the time display format.

Clock Mode [Only for the web console]

Settings: "Auto (Sync with PC)" / "Manual"

Select the time setting method.

Date and Time

Set the current time.

User Level

Settings: "LIVE" / "CAMERA CONTROL" / "ADMIN"

Select the user level.

The user level cannot be selected when registering for the first time (fixed to "ADMIN").

Username

Enter a username. Set the username to meet the following conditions.

- 1-16 characters
- Alphanumeric characters and symbols only
- Does not contain the following characters: # & : " < > \

The following usernames cannot be set.

- "." / ".." / "auto-login"

Password

Enter a password. Set a password that is difficult for a third party to guess.

- 8 to 16 characters
- At least one uppercase and lowercase English letter
- At least one number
- Does not contain the character \

Confirm Password

Enter the same password again for confirmation.

IP Address

Settings: "DHCP" / "Manual"

Select the IP address setting method.

Note
• If a DHCP server is used, selecting "DHCP" sets the IP address automatically. Since the configured IP address cannot be checked on the Web console, check it on the monitor console.

IP Address

Settings: "0.0.0.1" – "255.255.255.254"

Set an IP address that is not used by other devices.

Note
• The default IP address is "192.168.0.150." When installing multiple units of this product, set unique IP addresses. For details on how to check for duplicate IP addresses, refer to 4.6 Checking for Duplicate IP Addresses [▶ 43].

Subnet Mask

Settings: "0.0.0.1" – "255.255.255.254"

Set the subnet mask.

Gateway

Settings: "0.0.0.1" – "255.255.255.254"

Set the default gateway.

If the environment does not have a default gateway, you do not need to set "Gateway." Keep the default setting or leave it blank.

Hostname

Settings: Alphanumeric, - (hyphen) (up to 63 characters)

If "DHCP" is selected in "IP Address," enter the host name to register with the DHCP server. The default setting is "[Product Name]-[MAC Address]." Automatic registration with DNS depends on the settings on the DHCP/DNS server side.

Protocol

Settings: "HTTPS" / "HTTP and HTTPS"


Select the communication protocol with the web server.

The web browser address for accessing this product varies depending on the selected protocol.

- "HTTPS": https://<IP address of this product>/
- "HTTP and HTTPS":
  https://<IP address of this product>/ or http://<IP address of this product>/

2.5.2 Registering the Initial User on the Web Console

Operations are performed from a computer connected to a network.

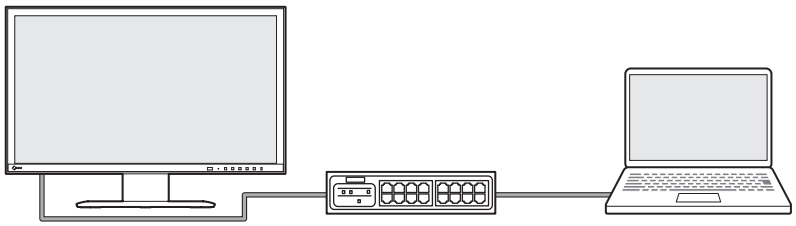

1. Press the power button (⏻) on the front of the product to turn on the power.
   The power indicator flashes blue while the system is preparing to start. It takes about 1 minute to start up.
   Once the system starts, the power indicator turns blue.
2. Launch the web browser.
   It is recommended to use Microsoft Edge version 79 or later.
3. Enter the address to access the product.
   – https://<IP address of this product>
   – http://<IP address of this product>
   The default settings are as follows.
   – https://192.168.0.150/
   – http://192.168.0.150/
   The initial setup wizard appears.


Note

- Since communication via HTTP is not encrypted, there is a risk that data may be intercepted by a third party. To ensure secure communication, it is recommended to use HTTPS.
- When accessing via HTTPS, a warning may appear in the browser, but this is normal behavior. If a warning appears, click "Advanced Settings" or "More Information" and select "Access this site (not secure)." After logging in, register a "CA-Signed Certificate" so that the warning will no longer be displayed.
- When accessing via HTTP, a warning message appears. Check the content of the message and take the necessary action.

4. Follow the on-screen instructions to configure each item.
   For details, refer to Registering the Initial User on the Monitor Console [▶ 17].
5. Click "Apply."
6. Click "OK" in the confirmation dialog box.

2.6 Displaying the Live Image Screen

1. Check if the main power switch is on.

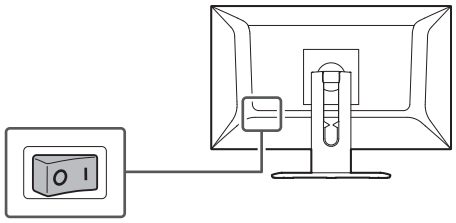

2. Press the power button (⏻) on the front of the product to turn on the power.
   The power indicator flashes blue while the system is preparing to start. It takes about 1 minute to start up.
   Once the system starts, the power indicator turns blue.
   The live image screen appears.



Note
• Press the power button (⏻) on the front panel. • You can also turn the power on/off with the power button (⏻) on the remote control.

2.7 Displaying the Setting Screen


The Setting screen can be operated from the monitor console (screen displayed on the monitor) or the web console (screen displayed in a browser).

To display the Setting screen, you must log in as a user with a user level of "ADMIN."

2.7.1 When Using the Monitor Console

Use a mouse to perform operations. The setting screen cannot be operated using the remote control.


Clicking an item that requires characters to be input will display a software keyboard.

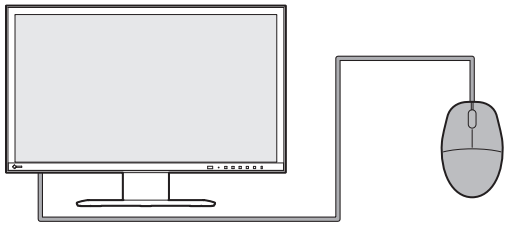

1. On the live image screen, click the login icon ( ).
2. Enter a username and a password.
3. Click "Login."
   The setting icon ( ) can then be selected.
4. Click the setting icon ( ).

2.7.2 When Using the Web Console

Perform operations from a computer connected to the network.

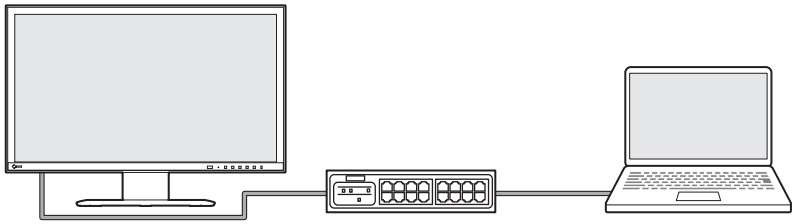


Note

- For information on computer network settings, refer to 4.7 Checking the IP Address of a Computer [▶ 43].
- It is recommended to use Microsoft Edge version 79 or later.
- Since communication via HTTP is not encrypted, there is a risk that data may be intercepted by a third party. To ensure secure communication, it is recommended to use HTTPS.
- When accessing via https:// during the initial startup, a warning may appear in your browser due to the use of a self-signed certificate. This is normal behavior. If a warning appears, click "Advanced Settings" or "More Information" and select "Access this site (not secure)." After logging in, register "CA-Signed Certificate" and the warning will no longer be displayed.

1. Launch the browser.
2. Enter the following address to access the site.
   Address: http://<IP address of this product> or https://<IP address of this product>
   In the default settings, the IP address is http://192.168.0.150/ or https://192.168.0.150/
   If you cannot display the web console, refer to 4.4 Other Problems [▶ 42].
3. Enter a username and a password.

4. Click "OK."
   The setting screen appears.

Note
• If you cannot log in, try the following address. http://<IP address of product>/index.html or https://<IP address of product>/index.html

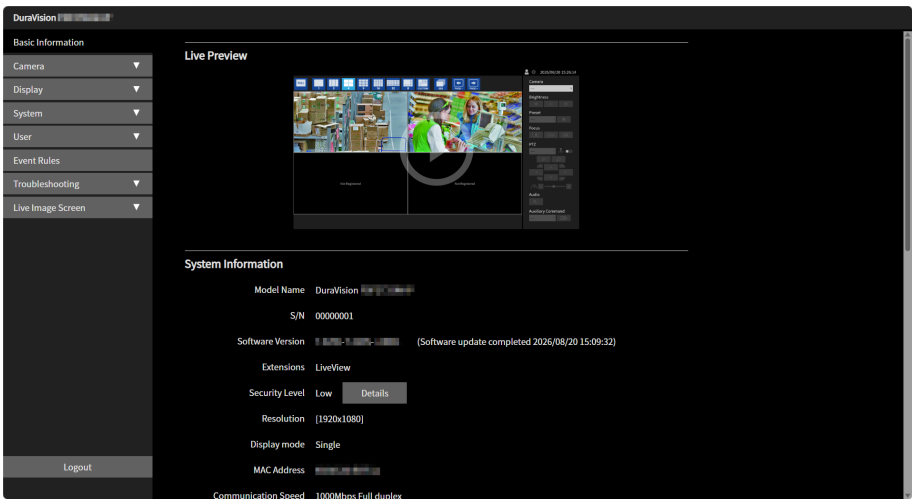

On the monitor console, the "Logout" menu at the bottom left of the screen changes to the "Return" menu.

2.8 Registering a Camera Using Auto Discovery

Cameras connected to the network can be automatically detected and registered.

Attention

- The following cameras and video encoders must be registered manually (refer to 3.4 Registering a Camera Manually [▶ 29]).
  - Cameras that cannot be automatically detected
    - Cameras on different subnets cannot be detected automatically.
    - Depending on the cameras, there are settings that refuse automatic detection, or settings that allow automatic detection only for a certain period of time after turning on the power.
  - Fisheye/panoramic cameras with multiple video streams
  - Video encoder with multiple cameras connected

1. Select "Camera" > "Camera Registration."
2. Click "Camera Auto Discovery."
3. Set each item.
   - "Protocol" (Protocol [▶ 25])
   - "User Name" (User Name [▶ 25])
   - "Password" (Password [▶ 25])
4. Click "OK."
   A list of detected cameras is displayed.
   Whether a camera can be automatically detected depends on the camera and network. Cameras that do not appear in the list must be registered manually.
5. Check the camera you want to register and click "Add."
6. Click "Apply."
7. Click "OK" in the confirmation dialog box.
   If a communication error is displayed, refer to 4.2 Camera Registration Problems [▶ 38].
   If the video is not displayed correctly, refer to 4.3 Video Problems [▶ 39].

Protocol

Select the protocol to control the camera.

- "ONVIF"*1
  ONVIF Profile S compatible cameras
- "AXIS"
  Axis cameras (VAPIX®)
- "Panasonic/i-PRO"
  Panasonic/i-Pro cameras

*1 When "Protocol" is set to "ONVIF," the "Media Type" will be "Media1."

User Name

Enter the username of the camera. A user with administrative privileges is required.

Password


Enter the password for the camera.

2.9 Preparing the Remote Control

Note
• The remote control is a separately sold optional accessory.

How to attach and remove batteries

1. Turn the bottom of the remote control upwards and slide it in the direction of the arrow to remove the cover.
2. Insert batteries (AAA size x 2) according to the "+ (positive)" and "- (negative)" poles indicated on the remote control.
3. Place the cover back on.

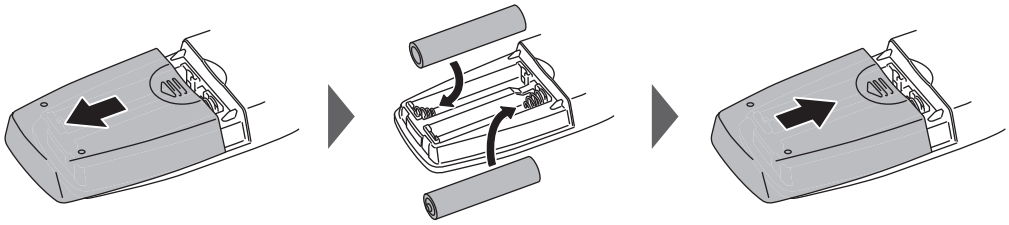

*To remove the battery, remove it in Step 2.

3 Other Settings

3.1 Updating Software

Use the web console to perform operations.

You can perform a software version upgrade. Please download the version update file from the EIZO website (www.eizoglobal.com) in advance. For stable operation of the system, it is recommended to use the latest software. It is not possible to revert to an older version.

1. Select "System" > "Maintenance."
2. Click "Software Update" > "File" > "Browse."
3. Select the software file (extension: duraup4).
4. Click "Start."
5. Click "OK" in the confirmation dialog box.
   The process starts.
   During processing, the power indicator flashes red. Do not turn off the power. It takes approximately 10 minutes to update the software.

3.2 Registering a License

Perform this operation on the web console.


1. Select "System" > "Maintenance."
2. Click "License Activation" > "Extensions" > "Activate."
3. Click "Browse" and select the license file (extension: duralic).
4. Click "OK."
   The process starts.
   Close the browser and wait 2 minutes before accessing again.

Attention
• Selecting "Deactivate" will remove all additional registered licenses.

3.3 Save and Load Settings Data to Other Products

This operation is performed in the web console.

You can save the settings data from a configured product and load them onto other products on the network. This helps reduce the effort of setting up each device individually.

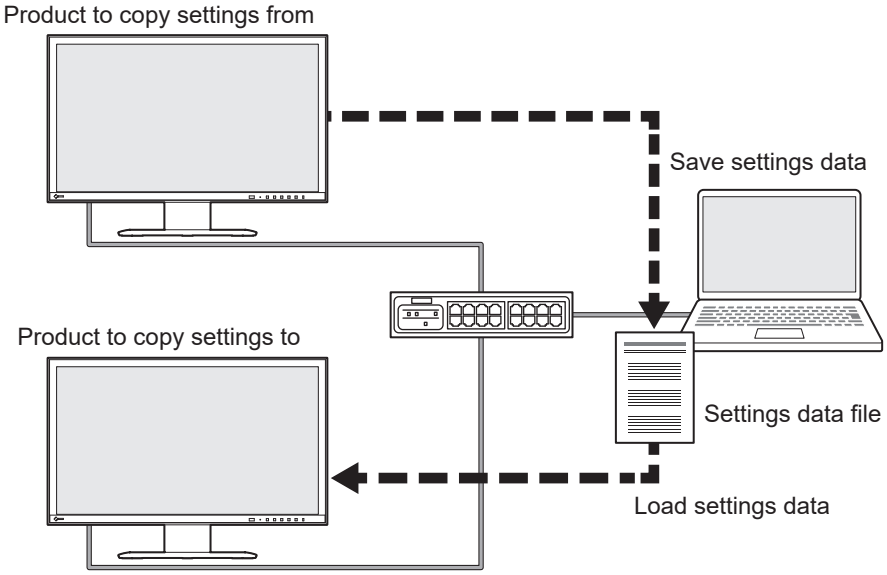

Attention

- Please set a unique IP address for each product in advance. If IP addresses are duplicated, the web console cannot be displayed.

1. Access the web console of the product whose settings you want to copy.
   Address: http://<IP address of the source product>/ or https://<IP address of the source product>/
2. Select "System" > "Maintenance."
3. Click "Save" under "Settings Data Migration" > "Settings Data."
4. In the "Settings Data Migration" dialog box, enter a Password to set for the file.
5. Click "OK."
6. Specify where to save the file.
   The settings data file will be saved.
7. Access the web console of the product to which you want to copy the settings.
   Address: http://<IP address of the destination product>/ or https://<IP address of the destination product>/
8. Select "System" > "Maintenance."
9. Click "Load" under "Settings Data Migration" > "Settings Data."
10. Select the settings data file and enter the password you set.
    Do not check "Include network settings."
11. Click "OK."
12. Click "OK" in the confirmation dialog box.
    The process will begin.
    Close the browser and access it again after 2 minutes.

3.4 Registering a Camera Manually

The following cameras and video encoders must be registered manually.

- Cameras that cannot be automatically detected
- Fisheye/panoramic cameras with multiple and different video streams
  - Register multiple fisheye/panoramic cameras with the same IP address and specify the streams to be displayed.
- Video encoder with multiple cameras connected
  - Register multiple video encoders with the same IP address and specify the streams to be displayed. For Panasonic/i-PRO video encoders that support multiple channels, specify the camera to be displayed in "Channel."

Attention
• Cameras must be connected to the network even when registering them manually.

1. Select "Camera" > "Camera Registration."
2. Check the position number to register, and click the edit icon ( ).
3. Set each item.
   The displayed items vary depending on the protocol. First, select "Protocol" (refer to Protocol [▶ 29]).
   - Common Items (Common items [▶ 29])
   - "ONVIF" (ONVIF [▶ 30])
   - "AXIS" (AXIS [▶ 31])
   - "Panasonic/i-PRO" (Panasonic/i-PRO [▶ 32])
   - "EIZO Streaming Gateway" (EIZO Streaming Gateway [▶ 33])
   - "DirectUri" (DirectUri [▶ 34])
   - "Still Image File" (Still Image File [▶ 35])
   - "Qognify" (Qognify [▶ 35])
4. Click "OK."
5. Click "Apply."
   The camera image is displayed on the live image screen.
   If a communication error is displayed, refer to 4.2 Camera Registration Problems [▶ 38].
   If the video is not displayed correctly, refer to 4.3 Video Problems [▶ 39].

3.4.1 Common items

Protocol

Settings: "ONVIF" / "AXIS" / "Panasonic/i-PRO" / "EIZO Streaming Gateway" / "DirectUri" / "Still Image File" / "Qognify"*1

*1 This can be selected when the corresponding extended functionality license are registered for this product.

Select the protocol used to control the camera.

- "ONVIF"
  ONVIF Profile S-compliant cameras
- "AXIS"
  Axis cameras (VAPIX)
- "Panasonic/i-PRO"
  Panasonic / i-PRO cameras

- "EIZO Streaming Gateway"
  Select when connecting to a product with the streaming gateway function enabled.
- "DirectUri"
  Select when connecting to an RTSP stream URI (URI starting with rtsp:///) or RTP stream URI (URI starting with rtp:///).
- "Still Image File"
  Select when specifying an uploaded still image.
- "Qognify"
  Select when integrating with Qognify VMS.

Camera Name

Settings: Any character (up to 100 characters)

Enter the camera name. To enter characters other than alphanumeric characters and symbols, use the web console. If you want to insert a line break in the camera name, enter \n at the position where you want the line to break.

Enter "IP Address," "Port," "Username," "Password" and click "Obtain Camera Name" to get the camera name from the camera.

3.4.2 ONVIF

IP Address

Settings: "0.0.0.1" – "255.255.255.254"

Enter the IP address of the camera.

Click "Ping" to perform a connection test on the camera.

Port

Settings: "1" – "65535"

Enter the port number of the camera.

The typical port number is "80" ("443" if SSL is enabled).

SSL

Configures secure settings.

The camera must have a server certificate set up.

Since communication via HTTP is not encrypted, there is a risk that data may be intercepted by a third party. To ensure secure communication, it is recommended to use SSL (HTTPS).

Certificate Validation

Performs certificate validation during SSL communication.

The camera's root certificate must be registered in "Certificate" > "Root Certificate."

Username

Settings: Alphanumeric characters and symbols (up to 32 characters)

Enter the username of the camera. A user with administrative privileges is required.

Password

Settings: Alphanumeric characters and symbols (up to 32 characters)

Enter the password for the camera.

Media Type

Settings: "Media1" / "Media2"

Select the media type.

- "Media1" (default setting)
  Select to connect to H.264 and MJPEG streams.
- "Media2"
  Select to connect to H.265 and H.264 streams. The camera must comply with both ONVIF Profile S and ONVIF Profile T.

Media Profile

Settings: Depends on the camera

Specify the stream to connect to by selecting a media profile. Click "Obtain Profile" to get a list of profiles from the camera.

Transmission Mode

Settings: "Unicast" / "Multicast"

Select the transmission mode

Comm. Method

Settings: "RTP over UDP" / "RTP over RTSP"

Select the communication method for camera video images.

3.4.3 AXIS

IP Address

Settings: "0.0.0.1" – "255.255.255.254"

Enter the IP address of the camera.

Click "Ping" to perform a connection test on the camera.

Port

Settings: "1" – "65535"

Enter the port number of the camera.

The typical port number is "80" ("443" if SSL is enabled).

SSL

Configures secure settings.

The camera must have a server certificate set up.

Since communication via HTTP is not encrypted, there is a risk that data may be intercepted by a third party. To ensure secure communication, it is recommended to use SSL (HTTPS).

Certificate Validation

Performs certificate validation during SSL communication.

The camera's root certificate must be registered in "Certificate" > "Root Certificate."

Username

Settings: Alphanumeric characters and symbols (up to 32 characters)

Enter the username of the camera. A user with administrative privileges is required.

Password

Settings: Alphanumeric characters and symbols (up to 32 characters)

Enter the password for the camera.

Video Stream

Settings: Depends on the camera

Select the view area for the stream. Click "Obtain Stream" to get a list of view areas from the camera.

The view area is used to stream a portion of the entire image. Refer to the User's Manual of the camera for details.

Stream Profile

Settings: Depends on the camera

Specify the stream to connect to by selecting a stream profile. Click "Obtain Profile" to get a list of profiles from the camera.

If no profile is registered on the camera, this product will automatically register the "EIZO_Profile" profile to the camera.

Transmission Mode

Settings: "Unicast" / "Multicast"

Select the transmission mode

Comm. Method

Settings: "RTP over UDP" / "RTP over RTSP"

Select the communication method for camera video images.

3.4.4 Panasonic/i-PRO

Unicast/Multicast cannot be set from this product. Change the transmission mode on the camera.

IP Address

Settings: "0.0.0.1" – "255.255.255.254"

Enter the IP address of the camera.

Click "Ping" to perform a connection test on the camera.

Port

Settings: "1" – "65535"

Enter the port number of the camera.

The typical port number is "80" ("443" if SSL is enabled).

SSL

Configures secure settings.

The camera must have a server certificate set up.

Since communication via HTTP is not encrypted, there is a risk that data may be intercepted by a third party. To ensure secure communication, it is recommended to use SSL (HTTPS).

Certificate Validation

Performs certificate validation during SSL communication.

The camera's root certificate must be registered in "Certificate" > "Root Certificate."

Username

Settings: Alphanumeric characters and symbols (up to 32 characters)

Enter the username of the camera. A user with administrative privileges is required.

Password

Settings: Alphanumeric characters and symbols (up to 32 characters)

Enter the password for the camera.

Stream

Settings: "1" / "2" / "3" / "4"

Select the stream to connect to.

Channel

Settings: "1" / "2" / "3" / "4"

Select a stream channel.

Comm. Method

Settings: "RTP over UDP" / "RTP over RTSP"

Select the communication method for camera video images.

3.4.5 EIZO Streaming Gateway

IP Address

Settings: "0.0.0.1" – "255.255.255.254"

Enter the IP address of the Streaming Gateway.

Click "Ping" to perform a connection test.

Port

Settings: "1" – "65535"

Enter the port number of the Streaming Gateway.

If "Protocol" is set to "EIZO Streaming Gateway," enter the access port of the Streaming Gateway web server (default: "80," or "443" if SSL is enabled).

SSL

Ensures secure communication.

A server certificate must be configured on the Streaming Gateway.

Since communication via HTTP is not encrypted, there is a risk that data may be intercepted by a third party. To ensure secure communication, it is recommended to use SSL (HTTPS).

Certificate Validation

Performs certificate validation during SSL communication.

The root certificate for the Streaming Gateway must be registered in "Certificate" > "Root Certificate."

Username

Settings: Alphanumerics and symbols (up to 32 characters)

Enter the user name of the Streaming Gateway. A user with administrative privileges is required.

Password

Settings: Alphanumerics and symbols (up to 32 characters)

Enter the password of the Streaming Gateway.

Stream List

Specify the stream to connect to. Click the "Obtain Stream List" button to get a list of streams from the transmitter.

If the source "Streaming Gateway" > "Streaming settings" > "Protocol" is set to "RTP" or "SRT," that stream cannot be selected.

RTSP Username

Settings: Alphanumeric characters and symbols (up to 79 characters)

The RTSP username is automatically set. It can also be changed.

RTSP Password

Settings: Alphanumeric characters and symbols (up to 79 characters)

The RTSP password is automatically set. It can also be changed.

RTSP Comm. Method

Settings: "RTP over RTSP"

Select the communication method for camera video images.

3.4.6 DirectUri

Note

- To receive an MPEG2-TS stream with RTP, select "Comm. Method" or "RTP over UDP" in "RTP over RTSP."
- To receive an MPEG2-TS stream over UDP, check the following points.
  - Specify the port number (1024 to 65535) that receives the stream in "Port" and select "MPEG2-TS over UDP" in "Comm. Method."
  - You should make stream transmission settings for this product from the transmitter in advance.
  - For non-multicast communication, leave the IP address blank.

IP Address

Settings: "0.0.0.1" – "255.255.255.254"

Enter the IP address of the camera.

Click "Ping" to perform a connection test on the camera.

Port

Settings: "1" – "65535"

Enter the port number of the camera.

Typical port numbers are "554" when "Protocol" is "DirectUri," and "URI" is an RTSP stream URI.

Username

Settings: Alphanumeric characters and symbols (up to 32 characters)

Enter the username of the camera. A user with administrative privileges is required.

Password

Settings: Alphanumeric characters and symbols (up to 32 characters)

Enter the password for the camera.

URI

Settings: Alphanumeric characters (up to 1023 characters)

Enter an RTSP stream URI (starting with rtsp://, http://, or https://) or an RTP stream URI (starting with rtp://).

Transmission Mode

Settings: "Unicast" / "Multicast" / "Source-Specific Multicast"

Select the transmission mode.

Comm. Method

Settings: "RTP over UDP" / "RTP over RTSP" / "MPEG2-TS over UDP" / "RTSP over HTTP" / "RTSP over HTTPS"

Select the communication method for camera video images.

3.4.7 Still Image File

Content number

Settings: "1" – "4"

Select an image uploaded using the "Still Image Registration" function (3.5 Registering Still Images [▶ 36]). A preview of the selected image is displayed.

3.4.8 Qognify

IP Address

Settings: "0.0.0.1" – "255.255.255.254"

Enter the IP address of the camera.

Click "Ping" to perform a connection test on the camera.

Port

Settings: "1" – "65535"

Enter the port number of the camera.

If "Protocol" is set to "Qognify," enter the server access port of the Qognify VMS (default: 62000).

Username

Settings: Alphanumeric characters and symbols (up to 32 characters)

Enter the username of the camera. A user with administrative privileges is required.

Password

Settings: Alphanumeric characters and symbols (up to 32 characters)

Enter the password for the camera.

Camera List

Click "Obtain Camera Name" to retrieve a list of camera names.

Comm. Method

Settings: "RTP over RTSP"

Select the communication method for camera video images.

3.5 Registering Still Images

[Only for the web console]

Upload images to this product. If you specify an uploaded image during camera registration, it can be displayed in the camera display area (refer to 3.4 Registering a Camera Manually [▶ 29]).

1. Select "Camera" > "Still Image Registration."
2. Click "Upload."
3. Select the image to register, then click "Open."

4 Troubleshooting

4.1 Power Problems

4.1.1 Live image screen is not displayed

- Power indicator does not light up
  - Check whether the power cord is connected properly.
  - Turn on the main power switch on the back of the monitor.
- Power indicator is red
  - Press the power button (⏻) on the front of the product.
- Power indicator repeatedly flashes red and blue in a fixed pattern
  - Disconnect the network cable, then reconnect the main power.
- System is stuck during startup
  - Disconnect the network cable, then reconnect the main power.
  - Make sure the monitor settings are correct. For more details, refer to the user's manual of the monitor.

4.1.2 After a power outage, the camera image is no longer displayed

- If the error code "E**-**" is displayed, refer to 4.3 Video Problems [▶ 39].
- Request the camera to stream again.
  - For the monitor console, click the setting icon (⚙) with the mouse to display the settings screen, then select "Return" to return to the live image screen.
  - For the web console, select "Live Image Screen" > "Stream Refresh" > "Stream Refresh" > "Execute."
- Depending on the camera, the settings may be reset when the power is turned off and on again. Check if the camera settings are correct (refer to 2.2 Setting Cameras [▶ 14]).

4.1.3 Restarts all of a sudden

- When the temperature inside the product rises high, this product may restart repeatedly. Check the temperature around this product. The internal temperature may rise high when the product is used in a narrow or poorly ventilated place or when the product is used with an object placed on top of it.

4.2 Camera Registration Problems

4.2.1 Camera cannot be detected automatically

- Whether a camera can be automatically detected depends on the camera and network. Cameras that do not appear in the list must be registered manually (refer to 3.4 Registering a Camera Manually [▶ 29]).

4.2.2 Communication error appears when clicking "Apply" in auto discovery

Auto discovery also detects cameras that do not have an IP address, username, or password set. To register, the camera must be configured correctly.

- Make sure you can connect to the camera (refer to 4.5 Checking a Camera Connection with Ping [▶ 43]).
- Check that a password is set for the camera (refer to 2.2 Setting Cameras [▶ 14]).
- Make sure the user you entered has administrative privileges.
- If different user names and passwords are set for each camera, check the position number where the error is displayed, click the edit icon ( ) and re-enter the username and password.

4.2.3 Communication error appears when clicking "Apply" in manual registration

- Make sure you can connect to the camera (refer to 4.5 Checking a Camera Connection with Ping [▶ 43]).
- Check that a password is set for the camera (refer to 2.2 Setting Cameras [▶ 14]).
- Make sure the user you entered has administrative privileges.
- Make sure the IP address, port (typically "80," or "443" if SSL is enabled), username and password of the camera are correct.
- Depending on the camera, there are settings to enable ONVIF connections, and relevant settings for the port, user, and password. Check if there are settings related to ONVIF profiles on the camera.
- Cameras not verified by EIZO may not be compatible with this product. Consider registering cameras with the "DirectUri" protocol. For the RTSP stream URI (URI starting with rtsp://) to be entered as the URI, refer to the User's Manual of the camera or contact the camera manufacturer. When connected via the "DirectUri" protocol, video can be displayed, but PTZ control and setting changes cannot be performed on the camera.

4.3 Video Problems

4.3.1 Error message "E**-**" is displayed


If the problem is not resolved, refer to Correct image is not displayed [▶ 41].

- E01-**
  - Check if the camera streaming settings are correct (refer to 2.2 Setting Cameras [▶ 14]).
  - There is a possibility that the camera is not working properly due to the high load. Disconnect other network devices accessing the camera or reduce the resolution or bit rate of the camera.
  - If the camera is connected to a different subnet, check that TCP and UDP communication is permitted on the router connecting the subnets.
- E02-**

  E02-02
  - Authentication has failed. Make sure the username and password of the camera are correct.

  E02-03
  - Streaming has stopped. If the error is caused by the camera being turned off or disconnection of the camera, the error changes to E02-04.
  - If the camera is connected to a different subnet, check that TCP and UDP communication is permitted on the router connecting the subnets.

  E02-04
  - Check if the power of the camera is on.
  - Make sure you can connect to the camera (refer to 4.5 Checking a Camera Connection with Ping [▶ 43]).
  - Make sure there are no duplicate IP addresses for the product or camera (refer to 4.6 Checking for Duplicate IP Addresses [▶ 43]).
    If the IP addresses of the products are duplicated, the camera image will be sent to only one device.

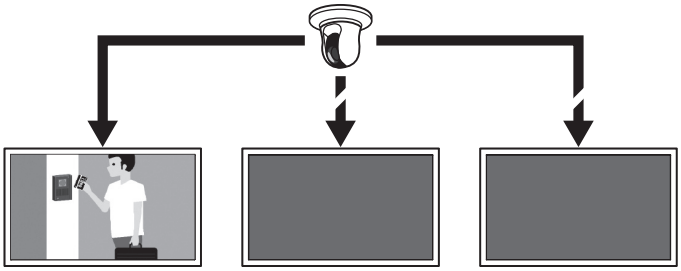

Products with duplicate IP addresses

  E02-07
  - If "Certificate Validation" is enabled, make sure that the certificate expiration date and other information are correct.

E03-**

– The network bandwidth may be under pressure or the display performance of this product may be exceeded. Reduce the resolution and/or bit rate of the camera (refer to 2.2 Setting Cameras [▶ 14]).

E04-**

– A resolution which is incompatible with this product may be set.
Try changing the resolution of the camera (refer to 2.2 Setting Cameras [▶ 14]).

E05-**

– The stream format from the camera may be different from that of this product. Check the settings of the camera and this product and then restart this product.

E06-**

– The multicast setting value may not be set correctly. Check the settings of the camera.

E07-**

– The network may not be connected, such as the network cable is not connected to this product. Check the network connection.

E08-**

– There is no available license to use the camera protocol. Check the license.

4.3.2 Moving object slows down or speeds up

If the problem is not resolved, refer to Correct image is not displayed [▶ 41].

- The stream may contain B frames.
  – Select "Live Image Screen" > "Advanced" and turn "B frame decode buffer" to "Enable." If the problem does not resolve, uncheck the box.
  – Select "Live Image Screen" > "Advanced" and turn "Skip non-reference frames" to "Enable." If the problem does not resolve, uncheck the box.
- If B frames are the cause, disabling B frames on the camera can also resolve the problem.
- Frames may not be output according to the timestamp from the camera. Select "Live Image Screen" > "Advanced" and turn "Sync timestamp" to "Enable." If the problem does not resolve, uncheck the box.

4.3.3 Correct image is not displayed

Images are distorted

Displayed images are not smooth

Black images are displayed

Images are displayed or distorted at different times

- Select "Live Image Screen" > "Advanced" and turn "Network traffic condition" to "On." A circle indicating the communication status is displayed in the upper right corner of the image. If the circle is green, communication is normal.



  If the circle is yellow or red, packets are not received successfully. There is a problem with the camera or network path.
  - There is a possibility that the camera is not working properly due to the high load. Disconnect other network devices accessing the camera or reduce the resolution of bit rate of the camera.
  - Make sure there are no problems with the router, hubs, or network cables in the network path.

  If the circle is gray, the stream exceeds the indicated performance of this product.
  - Reduce the resolution and/or bit rate of the camera.
- Make sure there are no duplicate IP addresses for the product or camera (refer to 4.6 Checking for Duplicate IP Addresses [▶ 43]).
- Make sure the camera user entered has administrative privileges.
- Check if the camera streaming settings are correct (refer to 2.2 Setting Cameras [▶ 14]).
- If the protocol is "ONVIF," "AXIS" or "Panasonic/i-PRO" and the transmission mode is "Unicast," select "RTP over RTSP" as the connection method. Since TCP is used for streaming, the problem may resolve with packet control.
- Check whether the used hubs and network cables are appropriate for handling the amount of information transferred. If the transmission mode is unicast, the amount of information transferred is (camera bit rate) x (number of connections).
- Select "Troubleshooting" > "Network Connection Status," and check the current communication bandwidth (sending, receiving).

4.4 Other Problems

4.4.1 Cannot log in

- Re-enter the username and password.
- Reset the account information using the Reset button and log in as the default setting account (refer to 1.2 Controls and Functions [▶ 9]).

4.4.2 Cannot display the setting screen

- You must log in as a user with a user level of "ADMIN."
- A USB mouse is required for configuration. Settings cannot be configured using the remote control.

4.4.3 The set date and time are not displayed correctly

- If the product has not been connected to a power source for over a week, the system date and time will not be displayed accurately. If this happens, set the date and time again (see "System Settings" - "Set the Date and Time" in the User's Manual).

4.4.4 Unable to view web console in browser

- Make sure there are no duplicate IP addresses for the product (refer to 4.6 Checking for Duplicate IP Addresses [▶ 43]).
- Check if the IP address of the computer is correct (refer to 4.7 Checking the IP Address of a Computer [▶ 43]).

4.4.5 License registration fails

- Check that the correct date and time are set in the system (see "System Settings" - "Set the Date and Time" in the User's Manual).
- Send the error code, product name, serial number, product software version, and the license file that caused the error to your license dealer.

4.4.6 The mouse / keyboard does not work

- Connect the USB cable correctly.
- Pull out the USB cable and connect it again.
- Make sure that the USB lock function is not enabled (refer to "User’s Manual" for details).

4.4.7 The camera display position cannot be changed

- "CAMERA CONTROL" or "ADMIN" users can operate the camera (refer to "User’s Manual" for details).
- Display position of the camera cannot be changed during sequential display (refer to "User’s Manual" for details).

4.4.8 No audio output

- Is the volume set to "0"?
- Check the settings of the camera.
  - Is the audio input configured correctly?
  - Is voice streaming enabled?
  - Have you selected an audio compression format that this product supports?

4.5 Checking a Camera Connection with Ping

To execute a Ping, perform one of the following.

- Click "Ping" in the "Camera Registration" edit screen.
- Select "Troubleshooting" > "Connection Confirmation," then select the camera and click "ping" > "Run."

If the camera cannot be connected, "Destination Host Unreachable" is displayed. Make sure the camera is turned on and that there are no problems with the routers, hubs, or network cables in the network path.

- Example) Execution results
  - If the camera can be connected

```
PING 192.168.0.27 (192.168.0.27) 56(84) bytes of data.
64 bytes from 192.168.0.27: icmp_seq=1 ttl=64 time=0.741 ms
64 bytes from 192.168.0.27: icmp_seq=2 ttl=64 time=0.771 ms
64 bytes from 192.168.0.27: icmp_seq=3 ttl=64 time=0.797 ms
```

  - If the camera cannot be connected

```
PING 192.168.0.27 (192.168.0.27) 56(84) bytes of data.
From 192.168.0.150 icmp_seq=1 Destination Host Unreachable
From 192.168.0.150 icmp_seq=2 Destination Host Unreachable
From 192.168.0.150 icmp_seq=3 Destination Host Unreachable
```

4.6 Checking for Duplicate IP Addresses

a. Select "Troubleshooting" > "Network Connection Status" and click "Current Status." If the IP address of this product is duplicated with other devices, "Unicast reply from" will be displayed for the number of duplicated units. Set unique IP addresses.

- Example) Execution result
  - If there are no duplicate IP addresses

```
ARPING 192.168.0.150 from 0.0.0.0 eth0
Sent 2 probes (2 broadcast(s))
Received 0 response(s)
```

  - If there are duplicate IP addresses

```
ARPING 192.168.0.150 from 0.0.0.0 eth0
Unicast reply from 192.168.0.150 [00:00:00:00:00:00] *1
Sent 2 probes (2 broadcast(s))
Received 0 response(s)
```

*1 The MAC address of duplicate device is displayed.

4.7 Checking the IP Address of a Computer

For Windows computers, you can check and change the LAN port network settings by following the steps below.

1. Press Windows + R key.
2. Enter ncpa.cpl in the "Run" window and click "OK."
3. Select "Ethernet" from the list and double-click.
   If there are multiple LAN ports, "Ethernet 2" and "Ethernet 3" are displayed.
4. Select "Internet Protocol Version 4 (TCP/IPv4)" and click "Properties."
5. Change the network settings and click "OK."

For setting details, contact the computer manufacturer.

Appendix

Warning for Radio interference

For U.S.A, Canada Only

FCC Supplier's Declaration of Conformity

We, the Responsible Party

Company: EIZO Inc.

Address: 5710 Warland Drive, Cypress, CA 90630

Phone: (562) 431-5011

declare that the product

Trade name: EIZO

Model: DuraVision FDF2331W-IP

is in conformity with Part 15 of the FCC Rules. Operation of this product is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

WARNING!

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will required to correct the interference at his own expense.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note

Use the attached specified cable below or EIZO signal cable with this monitor so as to keep interference within the limits of a Class A digital device.

- AC Cord
- Shielded Signal Cable (enclosed)

Canadian Notice

This Class A information technology equipment complies with Canadian ICES-003.

Cet équipement informatique de classe A est conforme à la norme NMB-003 du Canada.

For Europe, Australia, New Zealand, etc Only

Warning

Operation of this equipment in a residential environment could cause radio interference.

Warnung

Der Betrieb dieses Geräts in einer Wohnumgebung könnte Funkstörungen verursachen.

Avertissement

L'utilisation de cet équipement dans une zone résidentielle pourrait provoquer des interférences radio.

LIMITED WARRANTY

EIZO Corporation (hereinafter referred to as "EIZO") and distributors authorized by EIZO (hereinafter referred to as the "Distributors") warrant, subject to and in accordance with the terms of this limited warranty (hereinafter referred to as the "Warranty"), to the original purchaser (hereinafter referred to as the "Original Purchaser") who purchased the product specified in this document (hereinafter referred to as the "Product") from EIZO or Distributors, that EIZO and Distributors shall, at their sole discretion, either repair or replace the Product at no charge if the Original Purchaser becomes aware within the Warranty Period (defined below) that the Product malfunctions or is damaged in the course of normal use of the Product in accordance with the description in the instruction manual of the Product (hereinafter referred to as the "User's Manual").

The period of this Warranty is two (2) years from the date of purchase of the Product (hereinafter referred to as the "Warranty Period").

EIZO and Distributors shall bear no liability or obligation with regard to the Product in relation to the Original Purchaser or any third parties other than as provided under this Warranty.

EIZO and Distributors will cease to hold or store any parts (excluding design parts) of the Product upon expiration of five (5) years after the production of the Product is discontinued.

In repairing the Product, EIZO and Distributors will use renewal parts which comply with our QC standards. If the unit cannot be repaired due to its condition or the stockout of a relevant part, EIZO and Distributors may offer the replacement by a product with equivalent performance instead of repairing it.

The Warranty is valid only in the countries or territories where the Distributors are located. The Warranty does not restrict any legal rights of the Original Purchaser.

Notwithstanding any other provision of this Warranty, EIZO and Distributors shall have no obligation under this Warranty whatsoever in any of the cases as set forth below:

1. Any defect of the Product caused by freight damage, modification, alteration, abuse, misuse, accident, incorrect installation, disaster, adherent dust, faulty maintenance and/or improper repair by third party other than EIZO and Distributors;
2. Any incompatibility of the Product due to possible technical innovations and/or regulations;
3. Any deterioration of the sensor, including measurement value of the sensor;
4. Any defect of the Product caused by external equipments;
5. Any defect of the Product caused by the use under environmental conditions not anticipated by EIZO;
6. Any deterioration of the attachments of the Product (e.g. cables, User's Manual, CD-ROM, etc.);
7. Any deterioration of the consumables, and/or accessories of the Product (e.g. batteries, remote controller, touch pen, etc.);

8. Any exterior deterioration or discoloration of the Product, including that of the surface of the LCD panel, the touch panel and the protect panel;
9. Any defect of the Product caused by placement in a location where it may be affected by strong vibrations or shocks;
10. Any defect of the Product caused by leaking battery liquid;
11. Any deterioration of display performance caused by the deterioration of expendable parts such as the LCD panel and/or backlight, etc. (e.g. changes in brightness, changes in brightness uniformity, changes in color, changes in color uniformity, defects in pixels including burnt pixels, etc.);
12. Any deterioration or malfunction of the cooling fan caused by adherent dust.

To obtain service under the Warranty, the Original Purchaser must deliver the Product, freight prepaid, in its original package or other adequate package affording an equal degree of protection, assuming the risk of damage and/or loss in transit, to the local Distributor. The Original Purchaser must present proof of purchase of the Product and the date of such purchase when requesting services under the Warranty.

The Warranty Period for any replaced and/or repaired product under this Warranty shall expire at the end of the original Warranty Period.

EIZO OR DISTRIBUTORS ARE NOT RESPONSIBLE FOR ANY DAMAGE TO, OR LOSS OF, DATA OR OTHER INFORMATION STORED IN ANY MEDIA OR ANY PART OF ANY PRODUCT RETURNED TO EIZO OR DISTRIBUTORS FOR REPAIR.

EIZO AND DISTRIBUTORS MAKE NO FURTHER WARRANTIES, EXPRESSED OR IMPLIED, WITH RESPECT TO, INCLUDING, WITHOUT LIMITATION, THE PRODUCT AND ITS QUALITY, PERFORMANCE, MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR USE.

IN NO EVENT SHALL EIZO OR DISTRIBUTORS BE LIABLE FOR ANY INCIDENTAL, INDIRECT, SPECIAL, CONSEQUENTIAL OR OTHER DAMAGE WHATSOEVER (INCLUDING, WITHOUT LIMITATION, DAMAGES FOR LOSS OF PROFIT, BUSINESS INTERRUPTION, LOSS OF BUSINESS INFORMATION, OR ANY OTHER PECUNIARY LOSS) ARISING OUT OF THE USE OR INABILITY TO USE THE PRODUCT OR IN ANY CONNECTION WITH THE PRODUCT, WHETHER BASED ON CONTRACT, TORT, NEGLIGENCE, STRICT LIABILITY OR OTHERWISE, EVEN IF EIZO OR DISTRIBUTORS HAVE BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

THIS EXCLUSION ALSO INCLUDES ANY LIABILITY WHICH MAY ARISE OUT OF THIRD PARTY CLAIMS AGAINST THE ORIGINAL PURCHASER. THE ESSENCE OF THIS PROVISION IS TO LIMIT THE POTENTIAL LIABILITY OF EIZO AND DISTRIBUTORS ARISING OUT OF THIS LIMITED WARRANTY AND/OR SALES.



00N0N717B1
SUM-FDF2331W-IP

www.eizoglobal.com

Copyright © 2026 EIZO Corporation. All rights reserved.

2nd Edition – September, 2026